

DEFINITIONS


- Unit Under Test - Macintosh® II (UUT)
- Test Station - Macintosh Plus
Macintosh SE
Macintosh II

WHAT YOU NEED

- AppleCAT™ II Diagnostic Test Disk



- MacTest™ II Version 2.0 or higher



- Programmer's Switch




- Peripheral Cable for Communication



- Macintosh Serial Loopback Plug




- SCSI Loopback Test Card



- Multimeter




- NuBus Master Card and Apple Video Card (recommended)



- Mouse or Keyboard

TO SET UP APPLECAT II

1. Eject any disks in the UUT.
2. Install the programmer's switch so that the two long tabs go into the 2nd and 5th slots along the right rear side of the UUT.
3. Connect one end of the peripheral cable to the modem port of the test station. Connect the other end to the modem port of the UUT.
4. Connect the Macintosh serial loopback plug to the printer port of the UUT.
5. Connect the SCSI loopback card to the SCSI port of the UUT.
6. Install the video card in slot 1 and the NuBus® Master Card in slot 2 (from the power supply) of the UUT.
7. Connect either a mouse or a keyboard to the UUT.

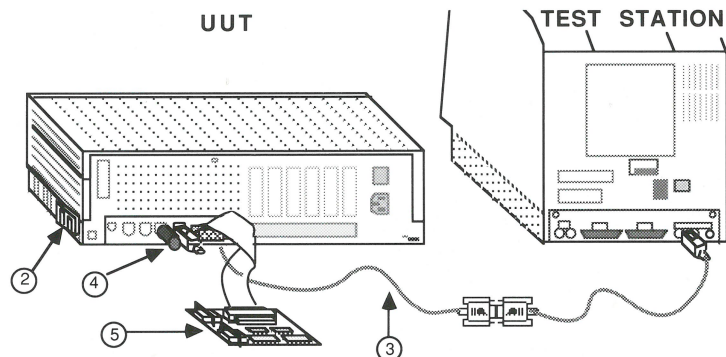

TO RUN APPLECAT II

1. Boot the AppleCAT program on the test station, but do not press Start.
2. Eject all disks from the UUT.
3. Turn on the UUT. If you hear only the single boot tone, wait a minimum of 5 seconds and press the interrupt switch on the UUT to enter interrupt mode. If you hear any additional tones, do not press the interrupt switch. You are already in interrupt mode.
4. Insert the MacTest II disk in the right drive of the UUT.
5. Click Start in the AppleCAT program.
6. Perform all the actions requested on the screen before you click Done.
7. Always repeat steps 2, 3, and 4 after a module has been replaced.

BACK OF UUT

